


6000/4IO Auxiliary Powered 4 Way Zone Alarm I/O Interface

- 2 x Monitored Detection Zones
- 2 x Monitored Inputs
- 2 x Monitored Alarm Outputs
- 2 x Volt Free Changeover Contacts
- Auxiliary 24vDC Powered
- DIN Rail Mounted
- Integral Short Circuit Isolator
- Protec Algo-Tec 6000 Protocol



The Protec 4 way input/output interface is a auxiliary powered input / output device providing 2 local zones of conventional detectors, 2 monitored inputs, 2 local monitored alarm outputs and two volt free changeover contacts. The contacts may be used to connect to ancillary equipment.

Wiring Diagram

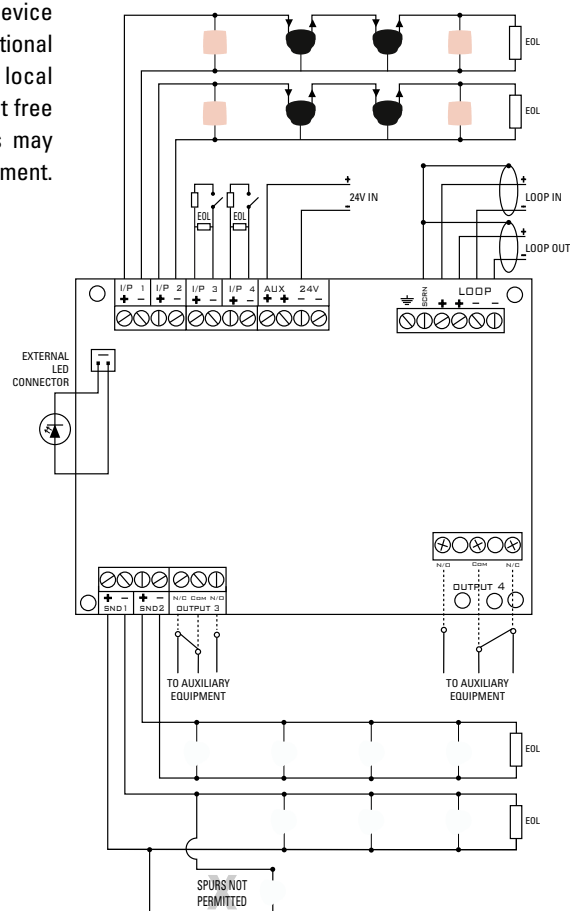

Technical Specification

Loop protocol	Protec Algo-tec™ 6000 MX1
Loop isolator fitted	Yes, on board (consult Protec DEL2110 for details)
Loop voltage range	18 to 28V peak loop
Number of loop addresses used	4 maximum, user and build configurable
24V Auxiliary input voltage range	18 to 28V dc
Environmental operational limits	-10 to 50°C (maximum 95% RH no condensation or icing)
Loop quiescent current (24V loop peak)	0.6mA
Loop alarm current (average)	0.6mA
Zone short circuit current (24V)	26mA peak $\pm$ 2mA
Zone end of line requirements (I/P 1 & I/P 2)	Resistive - 8.2k $\pm$ 5% ¼W, Capacitive - 100µ F $\pm$ 20% in series with 22Ω $\pm$ 5% ¼W
Input cabling requirements	Maximum cable resistance 6Ω per conductor Maximum cable capacitance 0.2µ F between cable conductors
Zone quiescent current	500µ A maximum (10 Protec 3000 detectors per zone)
Zone reset time	2 seconds, with active zone discharge
Manual Call Point requirements	Must be fitted with a series 330Ω or 180Ω resistor
Zone short circuit threshold	Below 5% of supply voltage
Zone fire threshold	Below 70% of supply voltage
Zone resistive open circuit threshold	Above 92% of supply voltage
Monitored input end of line details	End of line resistor value 47kΩ 1/4W $\pm$ 5%
Monitored input short circuit threshold	Below 230Ω
Monitored input fire threshold	Below 7.85kΩ
Monitored input pre-alarm threshold	Below 32kΩ (Input 3 only)
Monitored input open circuit threshold	Above 111kΩ
Sounders supported	Protec 3000 series
Sounder circuit end of line	10kΩ ¼W $\pm$ 5%
Sounder circuit cable requirements	Maximum cable resistance depends on Volt drop calculations Maximum cable capacitance 0.1 F between cable conductors.
Sounder short circuit fault threshold	Below 2kΩ
Sounder open circuit fault threshold	Above 18kΩ
Sounder current limit (maximum)	1.6A
Sounder circuit fuses	20mm x 5mm 1.6A Quick Blow
Clean contact output details	1 Single pole changeover rated for 2A maximum at 24V dc (non inductive) 1 Single pole changeover rated for 5A maximum at 230V ac (non inductive)
Weight	245g (including din rail housing, no backbox, 4 way build)
LED Indicator	Use only high brightness LED (Protec stock code: NK 02-676-46)

Company Policy is one of continuous improvement, we reserve the right to change specification without prior notice

Bosch Security Systems Pty Ltd, Suite 1, Level 2, 21 Solent Circuit, Baulkham Hills, NSW 2153, Australia

© 2024 Bosch Security Systems Pty Ltd

Tel: +61 02 9842 4700 Web: www.protec.co.uk Email: protecanz.info@au.bosch.com