




NYLON TUBING

(ABS018-O)

To join the trunk adapter to the sampling head of choice:
Flush, Conical or Discrete.
Available in 30 or 100 meters lengths.

Installation Instructions:
Push fit into both the trunk adapter and the sampling head.
Do not paint.
Keep pipe clean and free from dust.
Do not install in direct sunlight.
Only install with approved pipe.
Do not use solvents to clean,
only soapy water.

Part No. **ABS018-O**
Pipe colour **OPAQUE**
Diameter Tolerance **+/- 0.15mm**

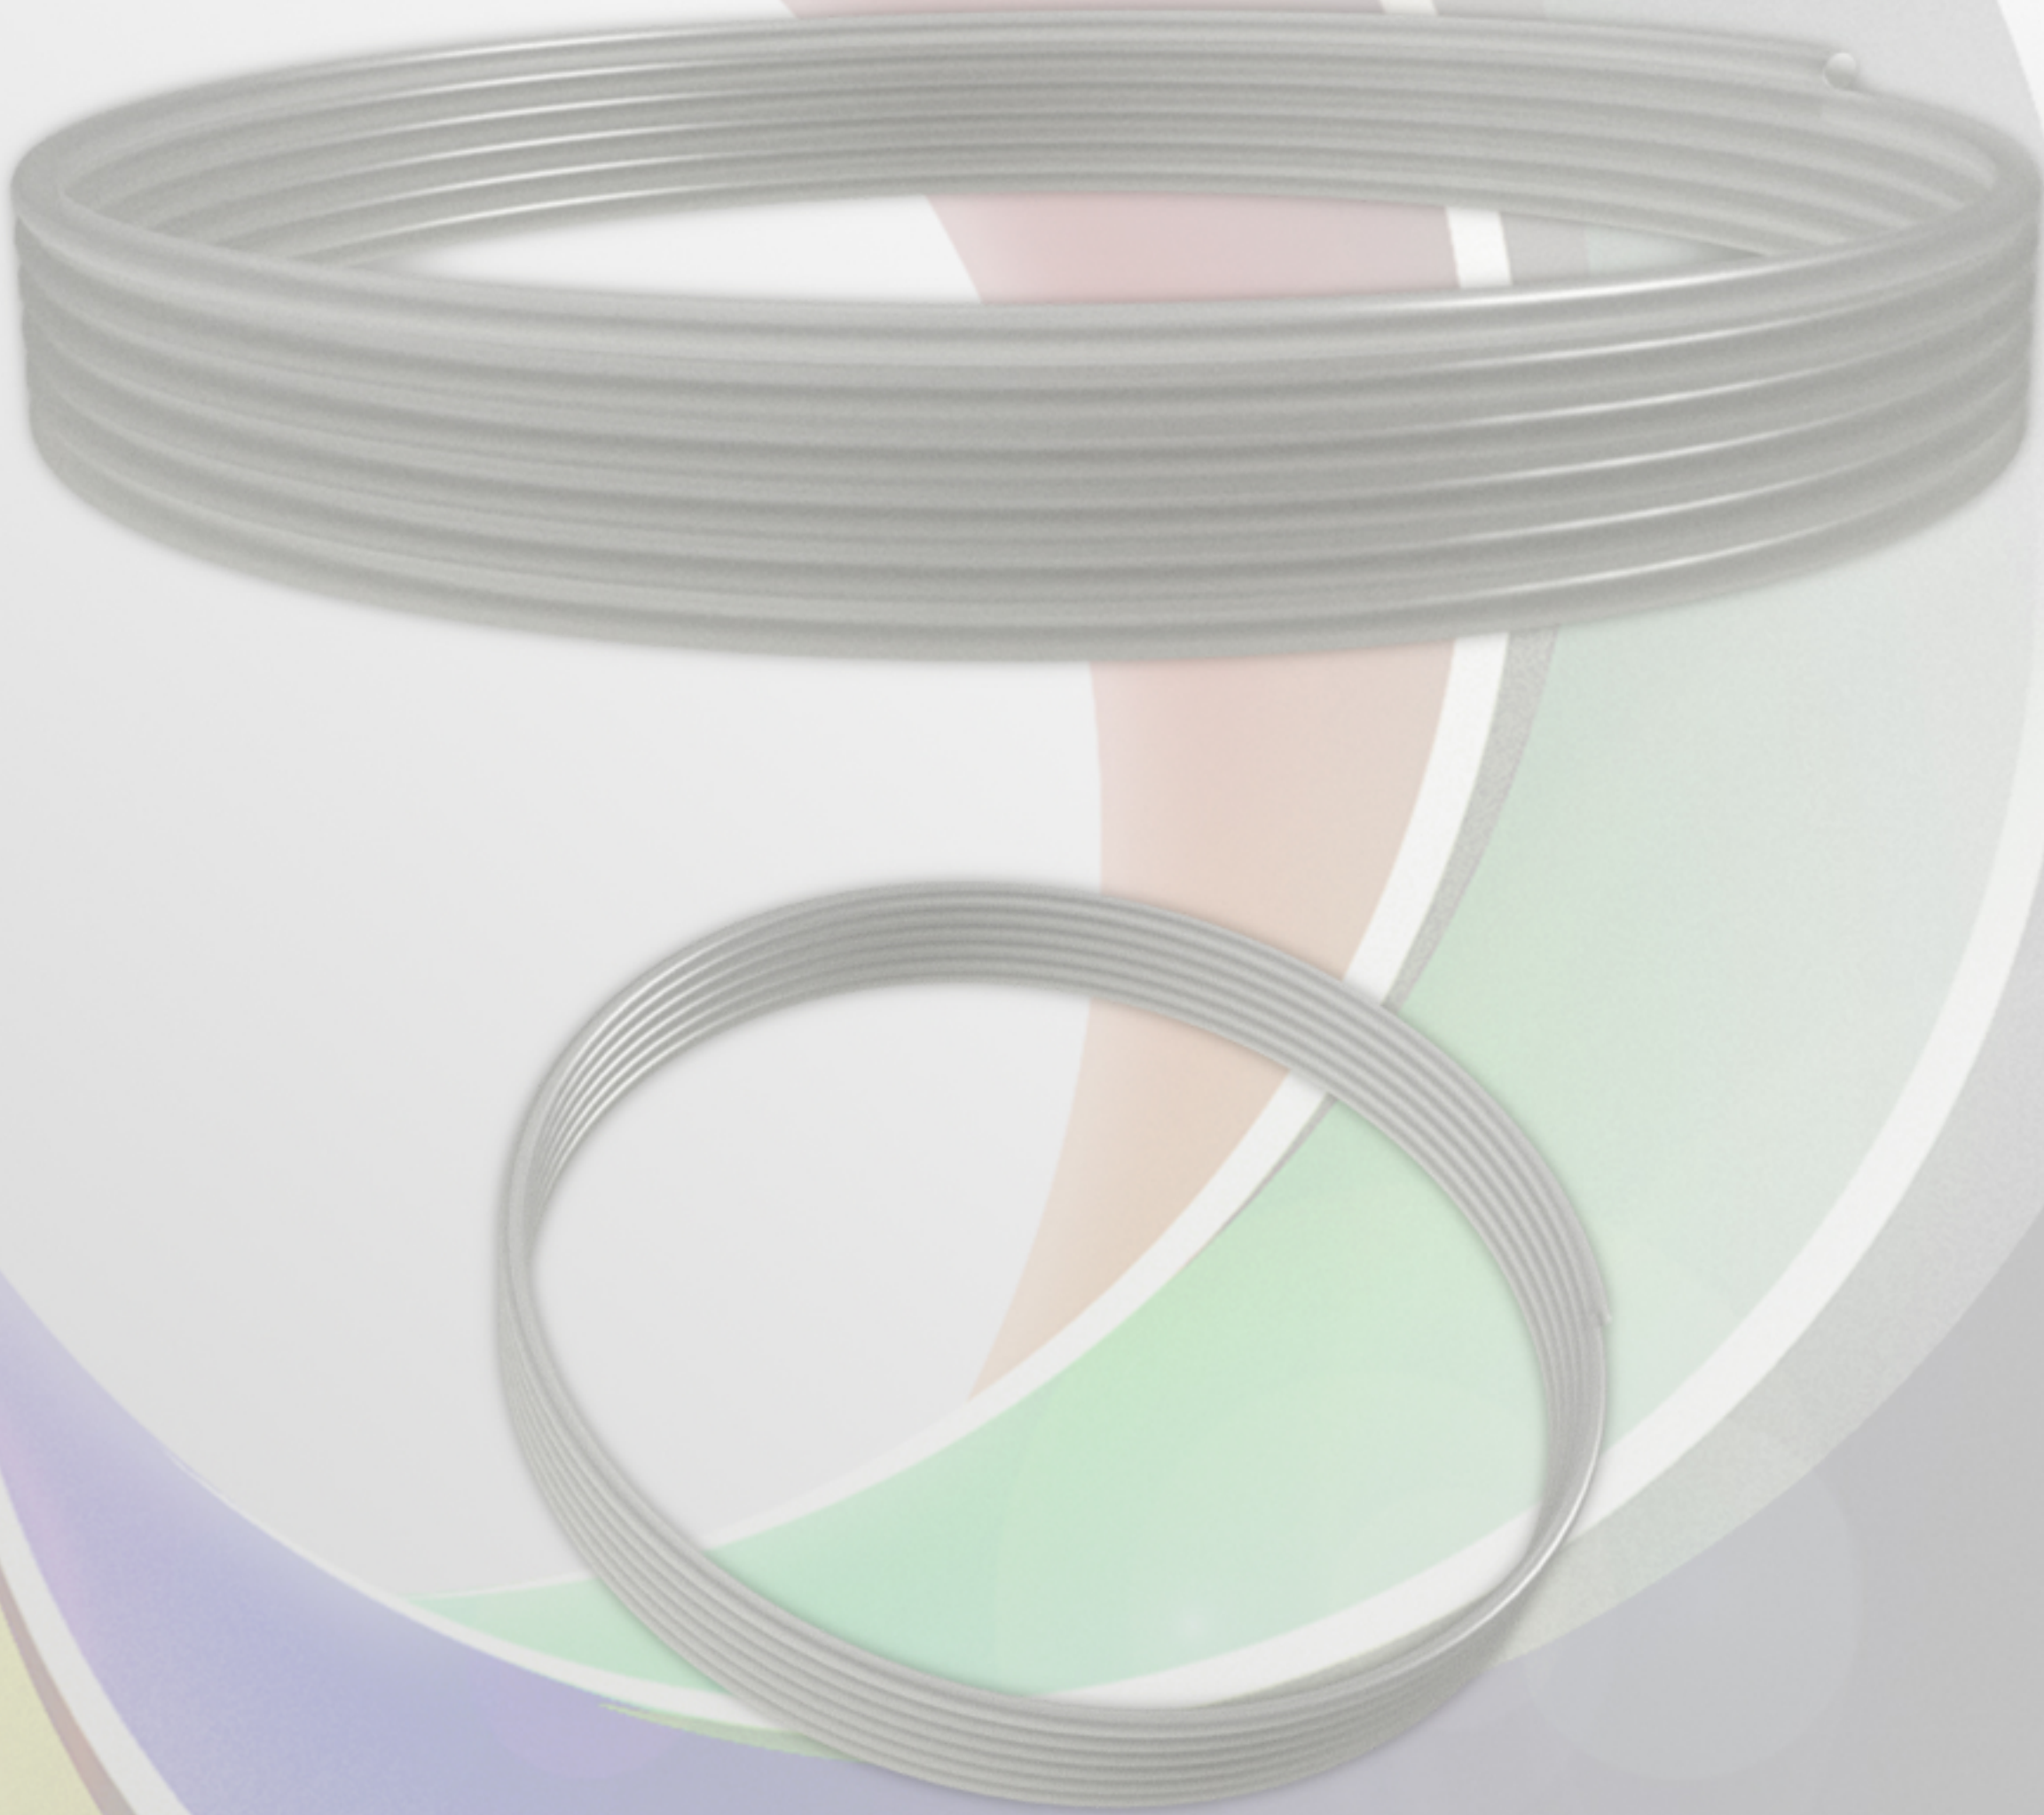

RAW MATERIAL DATA

Nylon

NFM 10x7.5 -
OD Tol's +0.03/-0.09mm
Burst Pressure 995 PSI / 68 bar
Bend Radius 40mm
Weight/30m 1.08kgs

NEM 10x8 -
OD Tol's +0.02/-0.10mm
Burst Pressure 772 PSI / 53 bar
Bend Radius 50mm
Weight/30m 0.87kgs

Temperature Range -
-40°C to +70°C, Occasional use up to
+130°C, Brittle point: -70°C

Technical information for use as
a guide only.

Pressure values given are based on
the short term burst pressure at 20°C
based on a 3:1 safety factor.
Any increase in temperature above
20°C will result in a decline in working
pressure values.

Products and specifications are subject
to improvements and change without
notice.

Bisson Ltd
Unit 11, Eldonwall Trading Estate,
St.Phillips, Bristol, BS4 3QQ

Tel: 0117-967-9999
Fax: 0117-961-9261
<http://www.abspipesandfittings.co.uk>