

DATASHEET

TI-HS4

Tekin 100V Horn Speaker 3W (Indoor)

Features

- 🔥 P.A Quality 3W Fire Alarm Indoor Horn Speaker
- 🔥 Built-in Blocking Capacitor for Line Monitoring
- 🔥 Built-in 100Vrms Line Transformer
- 🔥 ABS Construction with Steel Mounting Bracket
- 🔥 1W or 3W Wattage Tappings
- 🔥 Weighs only 0.6kg
- 🔥 Compact 145 x 145 x 150mm Dimensions
- 🔥 SPL 104dB +/- 3dB (1W@1M)
- 🔥 **10 Year Manufacturer's Warranty**

Overview

The Tekin HS4 fire alarm horn speaker produces P.A quality sound with a wide frequency response, making it suitable for use in a wide range of audio applications.

The built-in blocking capacitor enabling line monitoring makes it suitable for the NZ fire alarm industry.

In/Out connections ensure compliance with NZS4512 and both a 1 Watt or 3 Watt tapping settings provided.

Recommended for indoor use such as warehouses, plant rooms, industrial and factory applications, large open areas.



Figure 1: TI-HS4 Front, Side & Rear View



+64 800 483 547
+64 800 4 TEKIN



info@tekin.nz
www.tekin.nz




20 Mahoe St, Taupo 3378
Waikato, New Zealand

Technical Specification

Model	TI-HS4
Sound Pressure Level (SPL)	104 +/- 3dB (1W @ 1m)
Frequency Response	500Hz-5KHz
Voltage	100 Vrms
Power Tapping (Watts)	1W/3W
Line Monitoring	Built-in blocking Capacitor
Operating Temperature	-25° C to +55° C
Materials	ABS White (RAL9016)
Weight	0.6kg
Dimension (W x H x L)	145mm x 145mm x 150mm
Mounting	Wall or Ceiling Mount



Speaker Frequency Response

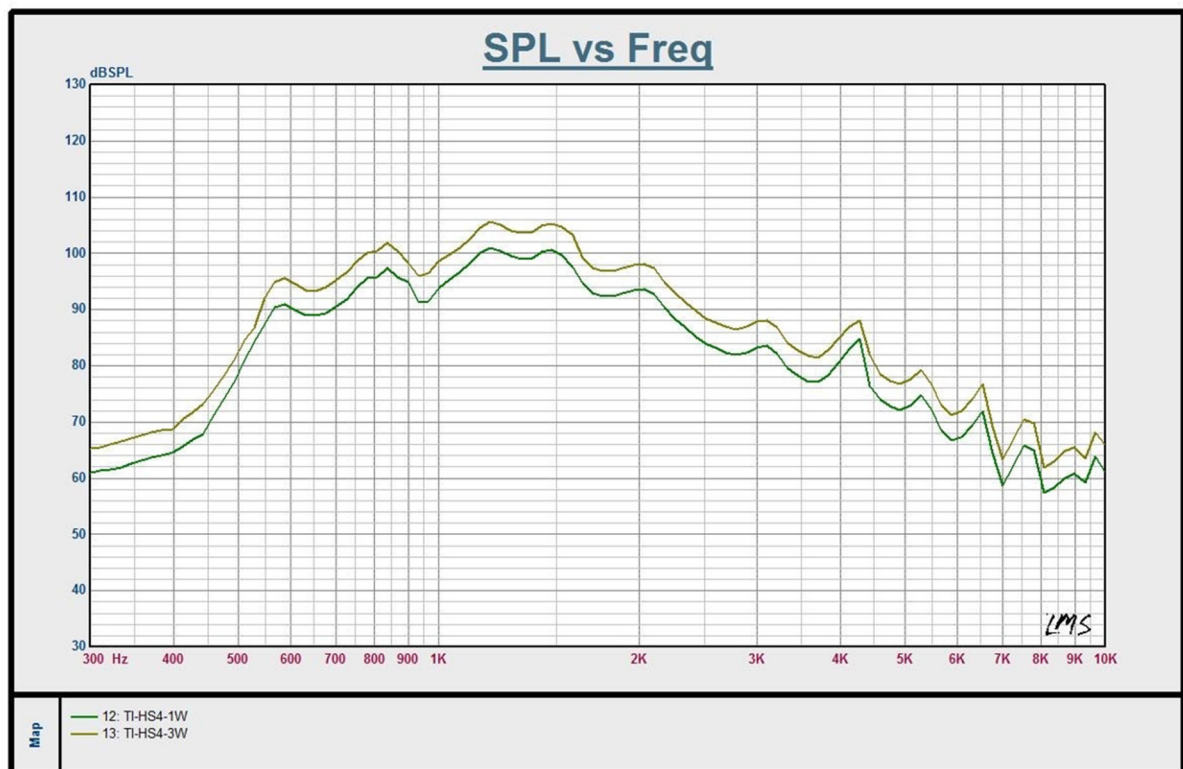

Product Ordering Code

Product Code	Product Description
TI-HS4	100V Horn Speaker 1W/3W (Indoor)



+64 800 483 547
+64 800 4 TEKIN



info@tekin.nz
www.tekin.nz



20 Mahoe St, Taupo 3378
Waikato, New Zealand