

CAPILLARY END CAP

(ABS021 - 25mm)

The capillary end cap is used when it is necessary to sample air not only in the pipe run, but also at the end of the pipe run.

It fits directly onto the end of the 25mm pipe. There is a 10mm hole in the end cap, which attaches normally to a 10mm OD nylon tube of a pre-determined length to which it is possible to attach either a discrete flush or a conical sampling head.


Installation Instructions:

Use the correct solvent Plusbond 3019. Do not paint.

Keep pipe clean and free from dust. Do not install in direct sunlight. Only install with approved pipe. Do not use solvents to clean, only soapy water.

ABS021 - 25mm Part No. Fitting color WHITE

Diameter Tolerance +/- 0.15mm

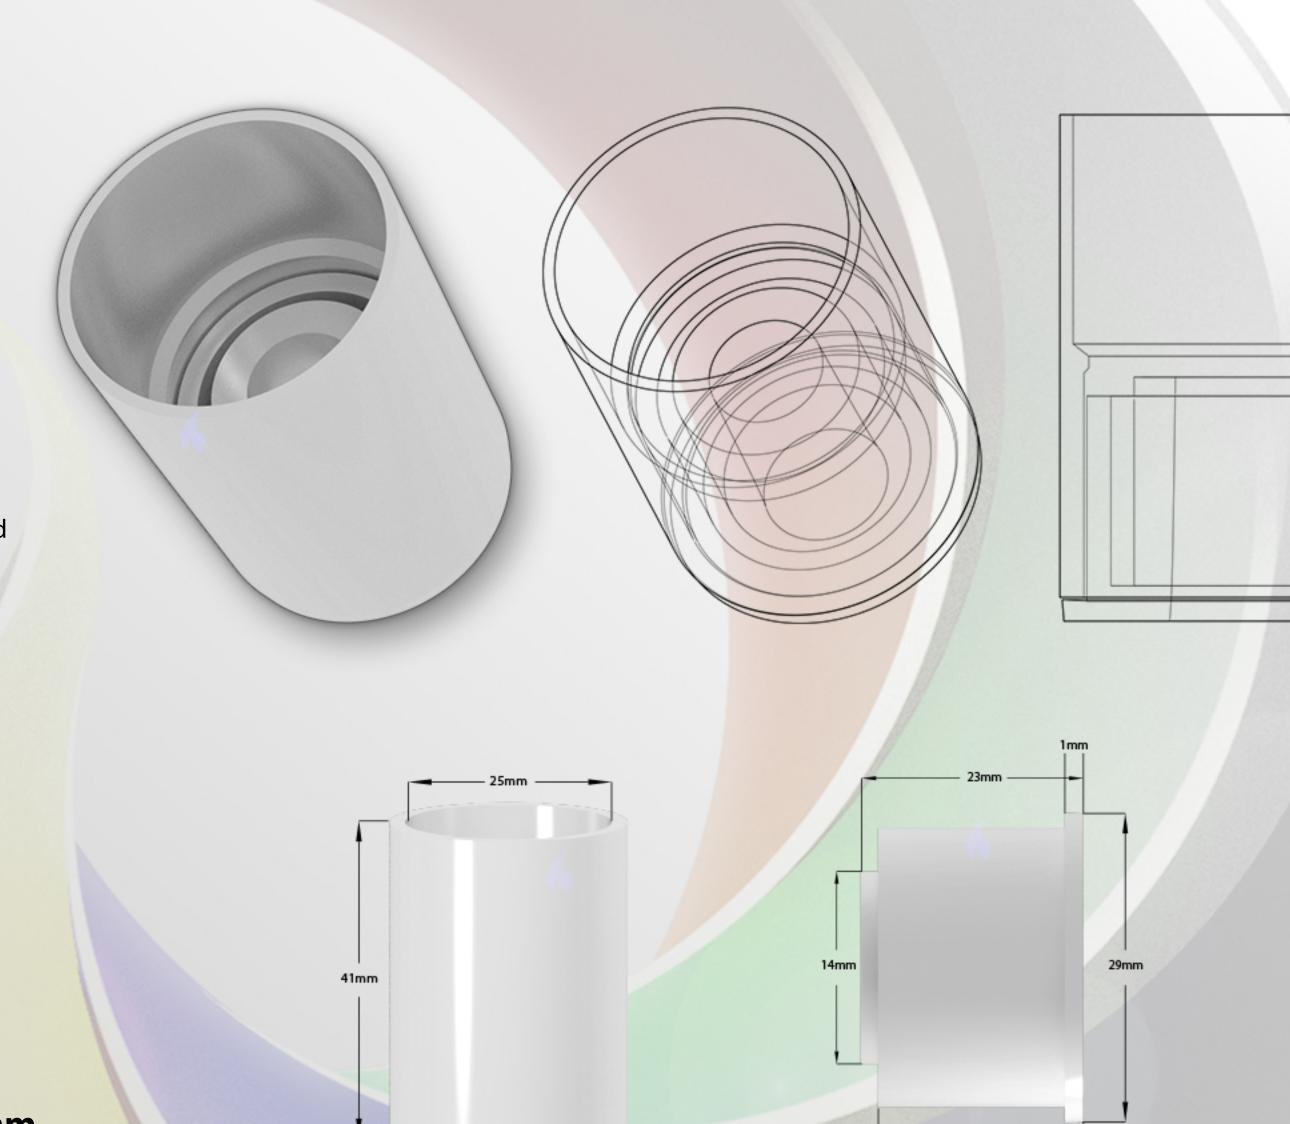

Capillary Adaptor

Jointing Socket

RAW MATERIAL DATA

Kumho ABS 750 **Acrylonitrile Butaduene Styrene**

Specific Gravity 1.04 Test Method ASTM D792

Melt Mass - Flow Rate (MFR) 200°C/21.6 kg 47 g/10 min 200°C/5.0 kg 4.1 g/10 min 220°C/10.0 kg 34 g/10 min Test Method ASTM D1238

Molding Shrinkage -Flow 0.0040 to 0.0070 in/in Test Method ASTM D955

Mechanical:

Tensile Strength Yield, 73°F (23°C) 1.97 in (50.0mm) 6670 psi Test Method ASTM D638

Tensile Elongation 1.97 in (50.0 mm), 15%

Test Method ASTM D638

Flexural Modulus

Yield, 73°F (23°C) 0.118 in (3.00 mm) 312000 psi Test Method ASTM D638

Flexural Strength

Yield, 73°F (23°C) 0.118 in (3.00 mm) 9230 psi

Test Method ASTM D790

Noched Izod Impact 73°F(23°C), 0.126 in (3.20 mm), 5.5 ft·lb/ii 73°F(23°C), 0.252 in (6.40 mm), 4.8 ft·lb/ir Test Method ASTM D256

Rockwell Hardness (R-Scale) 108 Test Method ASTM D785

Deflection Temperature Under Load 264 psi (1.8 MPa), Unanneald 185°F/85°C Test Method ASTM D648

Vicat Softening Temperature 203°F/95°C Test Method ASTM D1525

Flamibility

Flame Rating 0.0630 in (1.60 mm) HE 0.0866 in (2.20 mm) HB 0.126 in (3.20 mm) HB Test Method UL 94

Bisson Ltd Unit 11, Eldonwall Trading Estate, St.Phillips, Bristol, BS4 3QQ

Tel: 0117-967-9999 Fax: 0117-961-9261 http://www.abspipesandfittings.co.uk